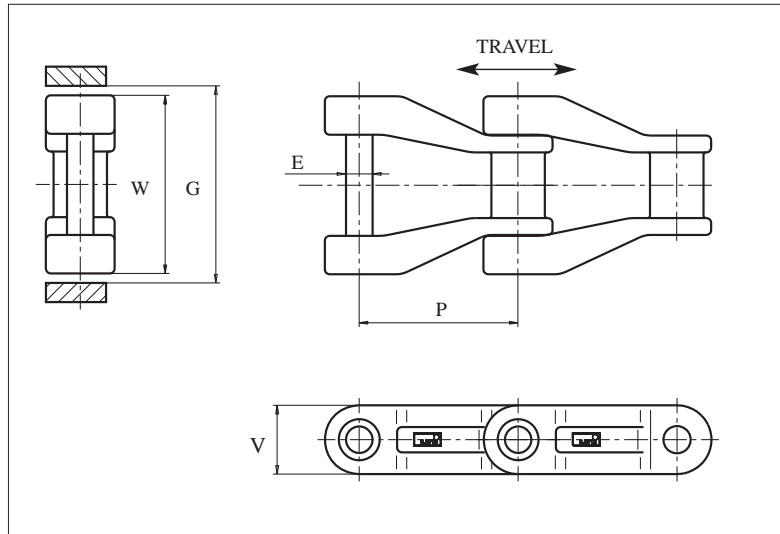




The uni NH78 chain is a typical straight running crate conveyor chain.

The uni NH78 chain is designed to run in both directions.

The uni NH78 chain is very suitable, where wearability and chain strength demands are very high.












	mm	in.		mm	in.
E	11.0	0.43	P	66.3	2.61
G	78.0	3.07	V	28.6	1.13

All dimensions are for POM-chains.

Items with **bolded** uni reference numbers are standard.
 Items with uni reference numbers in *italic* are available on a made-to-order basis.

	uni reference no.							pin		pin fixing	width W		weight	
	POM-D	POM-LF	PA6	GR	PA66GF	PA6GF	AR	mm	in.		mm	in.	kg/m	lb/ft
uni NH78 T1	35DNH78G	35LFNH78	<i>35PA6NH78K</i>					ø11	0.43	staked	74.0	2.91	2.1	1.41
uni NH78 T2				<i>35GR6NH78K</i>	<i>35PA66G30 NH78K</i>			ø11	0.43	staked	74.0	2.91	2.1	1.41
uni NH78 T3						<i>35PA6G25 NH78K</i>		ø10	0.39	staked (PE-sleeve)	74.0	2.91	2.1	1.41
uni NH78 T4						<i>35PAG25SP NH78K</i>		ø10	0.39	cotter-pin (PE-sleeve)	74.0	2.91	2.1	1.41
uni NH78 T5							<i>35ARNH78K</i>	ø11	0.43	staked	74.0	2.91	2.1	1.41

uni NH78 Special Chains • Plastic

-  Straight running
-  66.3 mm (2.61 in.)
-  See page 14 and 15
-  **SS304** See page 13
-  75 mm (3.0 in.)
-  See page 109
-  See page 118
-  6.1 m = 20 ft
No. of links/box: 92
-  POM: 8000 N (1798 lbf)