




Positive Drive
DualDrive

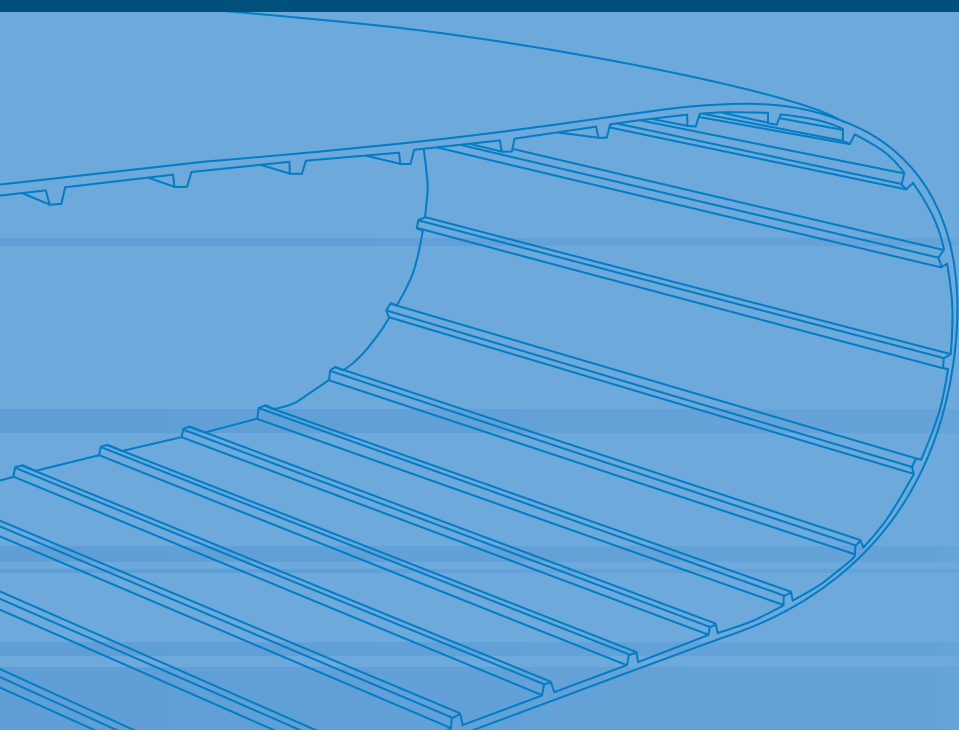

The Next Step in Belting

DualDrive

When increased hygiene standards are needed, the DualDrive belt is ideal for direct replacement of existing modular belts.

Minimal retrofit requirements. It can run on certain types of existing sprockets although our own sprocket design will ensure longer life and optimal performance.

DualDrive is a fully extruded positive drive belt featuring a smooth homogenous character & integral teeth on the drive side which can act as built-in cleats when necessary.

Material Features:


- Smooth homogenous surfaces
- Impression top textures are available for special non stick applications
- No ply or fraying
- No cracks or crevices that can potentially harbor bacteria thus ensuring lower bacteria counts and maximum cleanliness
- Easily and effectively cleaned reducing downtime and water consumption to a minimum

Mechanical Benefits:


- Replaces modular belts with little or no retrofit
- Eliminates modular components that require extensive cleaning and lengthy soaking
- Greatly reduced noise levels when compared to modular belting
- Prevents slippage of the belt
- No belt pretension, avoiding elongation and increasing belt life
- No seams or factory splicing
- Extruded in 30 or 60 m. (100 or 200 ft.) lengths
- Non machined, fully extruded drive surface can also be used as cleats when the teeth are facing up
- DualDrive Lace allows easy belt removal for cleaning or conveyor maintenance



DualDrive with Intralox Series 800 pulleys

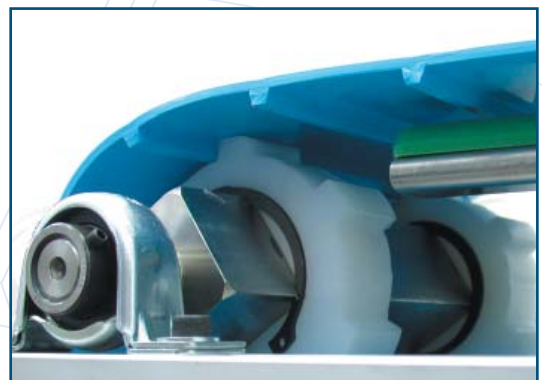

DualDrive with Volta supplied pulleys

 **DualDrive positive-drive belts lower your water consumption, maintenance and sanitation costs while drastically boosting your production hygiene level.**

Product	FMB		FMB-ITO 50	FMB-IRT	FMW
Color	Blue		Blue	Blue	Beige
Thickness (mm)	3	4	3	4	3
Min.Pulley Diameter (mm)	80	120	80	100	80
Pulley diameter (O.D)	93.4mm, 125.6mm, 157.7mm, 189.9mm				
Shore Hardness	53D				
Temperature Range	-20° to +60° C				
Food Approvals	FDA/USDA/USDADairy Approved				



VOLTA Belting Technology Ltd.

USA

Tel: +1 973 276 7905
 Fax: +1 973 276 7908
 Tol Free: 1-877-VOLTAUS

EUROPE

Tel: +31-546-580166
 Fax: +31-546-579508

www.voltabelting.com ■ e-mail: sales@voltabelting.com